




# TRUCK Cellular Signal Booster

Stop dropped calls. Ensure your connection.


## VOLTEX 50 TRUCK PLUS

American Booster's VOLTEX 50 TRUCK PLUS provides an advanced solution for boosting your signal and increasing your data speeds anytime, anywhere.

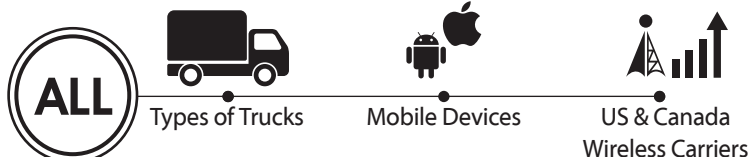


**2-Year Warranty**

## How It Works

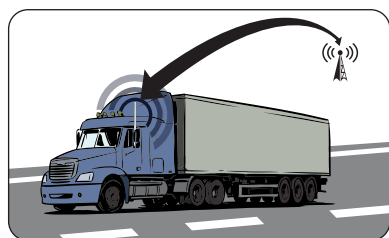


### Receives Signal

The outside antenna receives voice and data signals from a nearby cell tower.

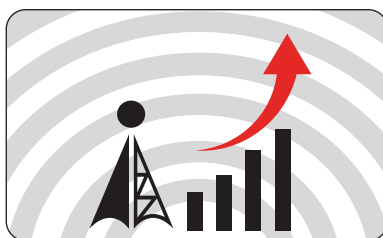

### Boosts Signal


The booster amplifies the outside signals and sends them to the inside antenna.

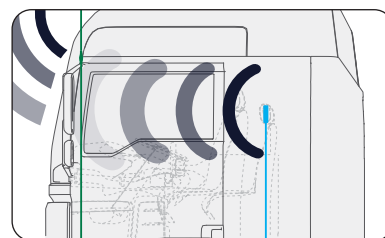

### Distributes Signal

The inside antenna distributes the boosted signals throughout your vehicle and provides better cellular coverage and faster data speeds.

# Anytime, Anywhere Boost Your Cell Bars. Stay Connected.

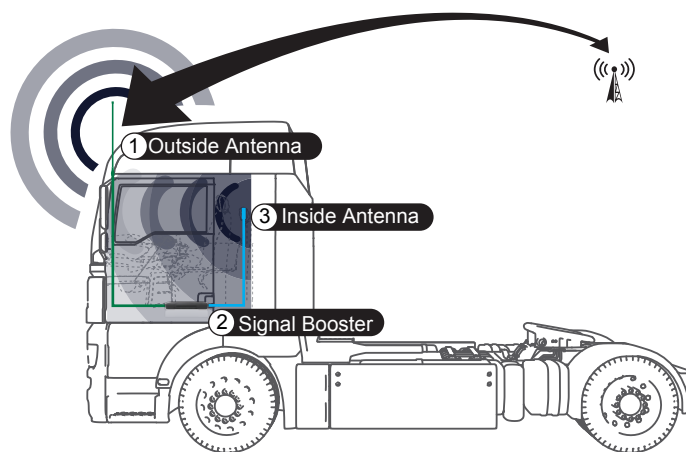

## American Booster's Benefits



Improves Voice Signals



Reduces Dropped Calls



Boosts Data Speeds



No Additional Monthly Fee



Environmentally Friendly



Supports Multiple Users



Extends Phone-Battery Life



3G, 4G, LTE Coverage




Easy Installation

# TRUCK Cellular Signal Booster


Stronger signal. Faster data speeds.

## How To Install

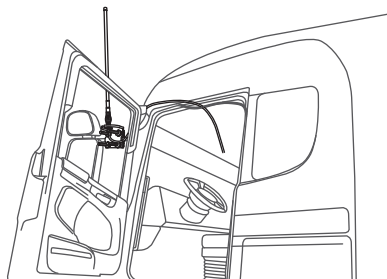


### Mount the Outside Antenna

Mount the outside antenna above the metal cab of your vehicle.

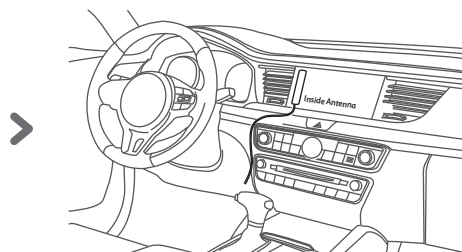

### Place the Inside Antenna

Place the inside antenna close to your front dashboard.

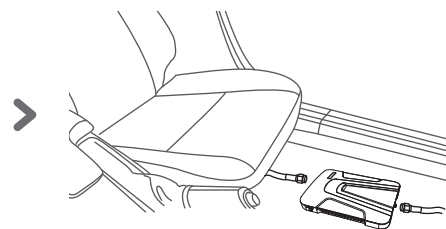

### Install Signal Booster

Place the VOLTEX 50 beneath a seat and connect the antennas' and power cables.

## Specifications

Parameter	Downlink	Uplink	Remark
700MHz LTE	734MHz ~ 757MHz	704MHz ~ 716MHz	Band 17 & 13
		776MHz ~ 787MHz	Band 17
800MHz Cellular	869MHz ~ 894MHz	824MHz ~ 849MHz	Band 5
1900MHz PCS	1930MHz ~ 1995MHz	1850MHz ~ 1915MHz	Band 25
2100MHz AWS	2110MHz ~ 2155MHz	1710MHz ~ 1755MHz	Band 4
Composite Power	5dBm	23dBm	
Maximum Gain	50dB		
Noise Figure	5dB nominal		
Impedance	50 Ohm		
RF Connector	SMA Female		
Power Connector	DC-045B		
Power	DC 12V / 3A		
Size, inch	5.12" × 6.5" × 1.0"		W × H × D
Weight, lbs	1.21		
Operation Temperature	23 ~ +122°F (-5 ~ +50°C)		
Humidity	0 ~ 80%		

## In The Box

